

STRATA GREASE INTERCEPTOR - 1500



TOP
No. STRATA-TOP
5,140 lbs.

(3) - No. 30 x 4 Castings
(Bolt-Down and Gasketed)
30" Clear Access

Hook Lift Anchors
(4 Places Top & Base)

BASE ASSEMBLY
No. STRATA-B-1500
15,035 lbs.

Base	15,035 lbs.
Baffle Wall	140 lbs.
Total	15,175 lbs.

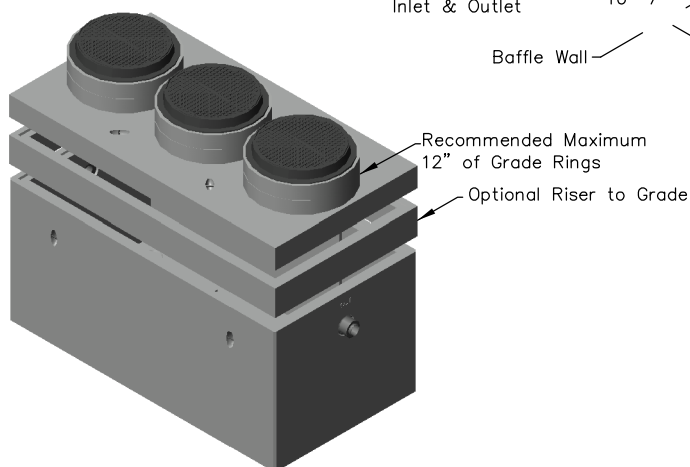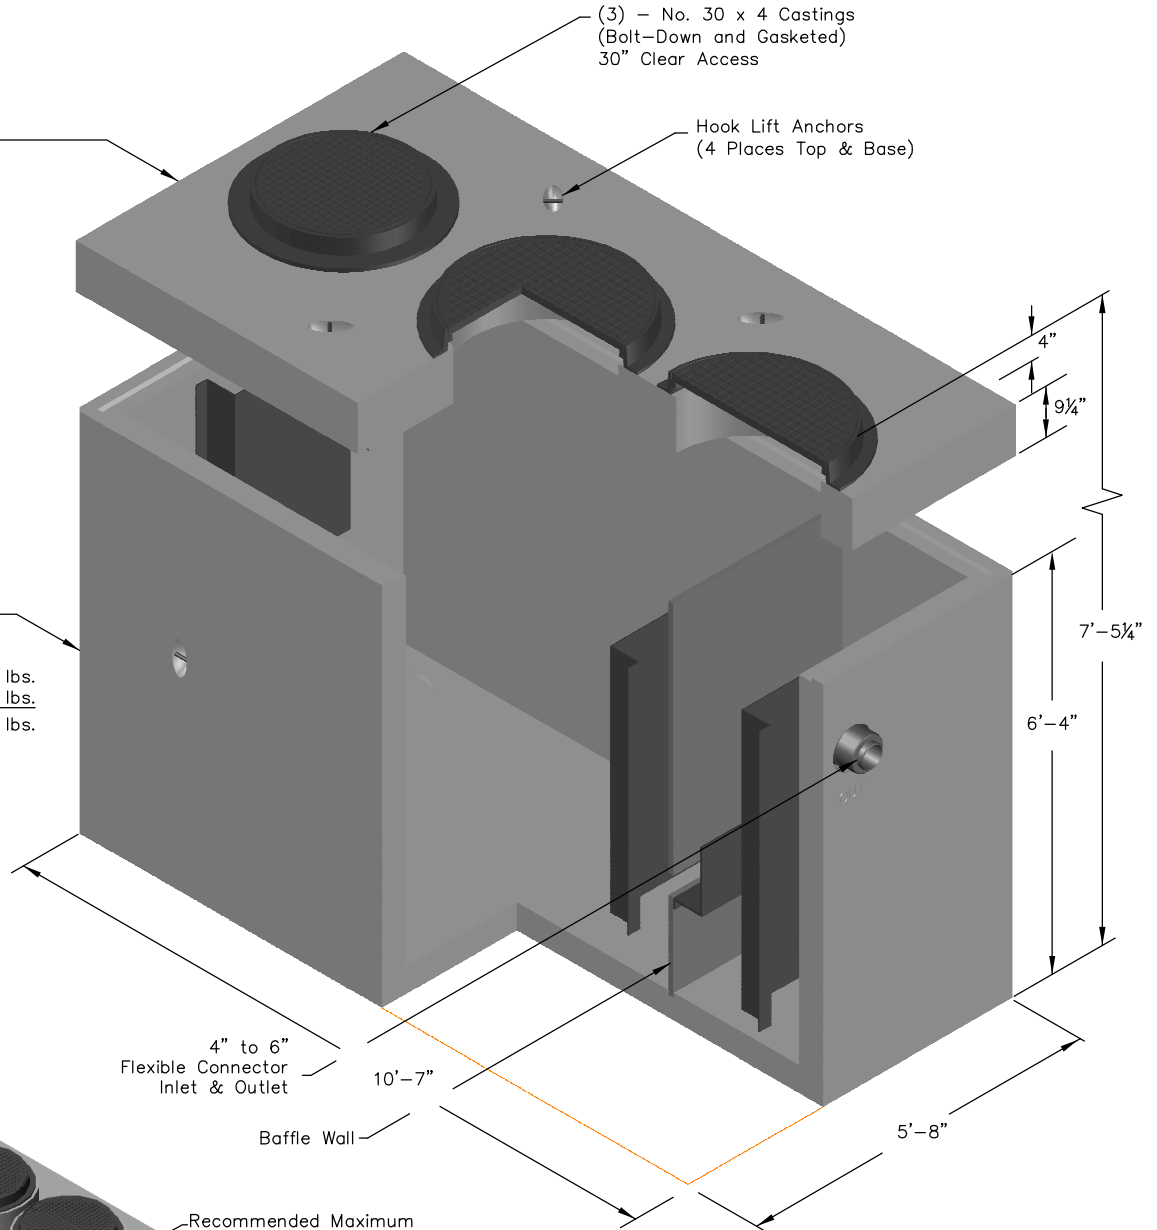

"IAPMO Listed"

Note: Designed for 0 to 5'-0" of Cover



PO Box 323, Wilsonville, Oregon 97070-0323
Tel: (503) 682-2844 Fax: (503) 682-2657

GREASE INTERCEPTOR


File Name: 020-STRATA-1500

Issue Date: 2016


oldcastleprecast.com/wilsonville

STRATA
GREASE INTERCEPTOR
GGI-1500 GALLON

STRATA GREASE INTERCEPTOR - 1500

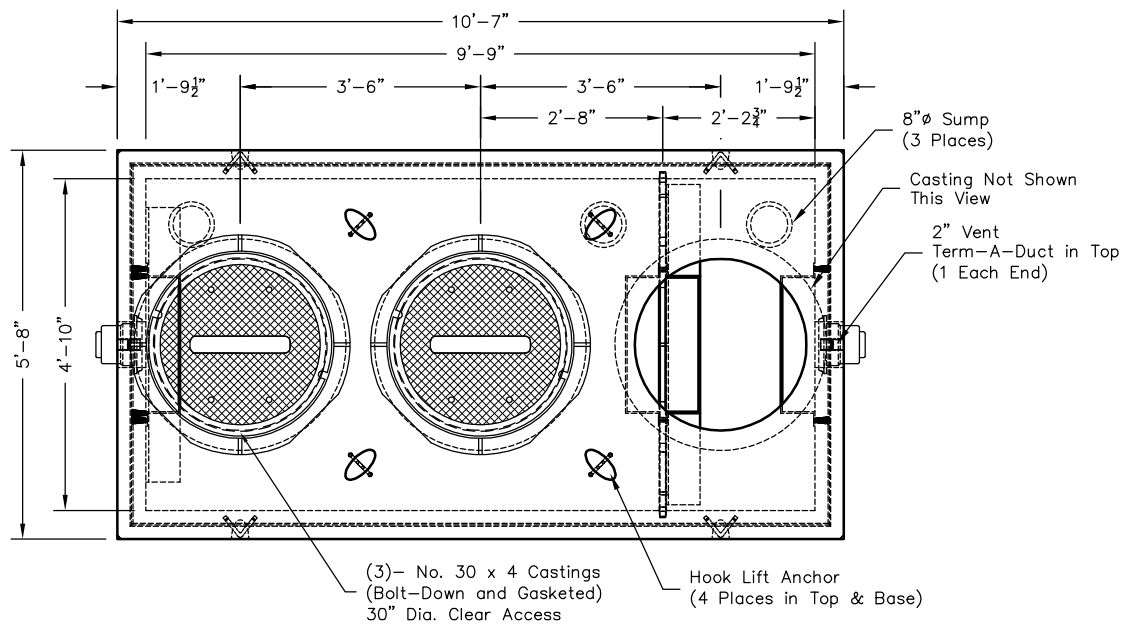

PLAN VIEW

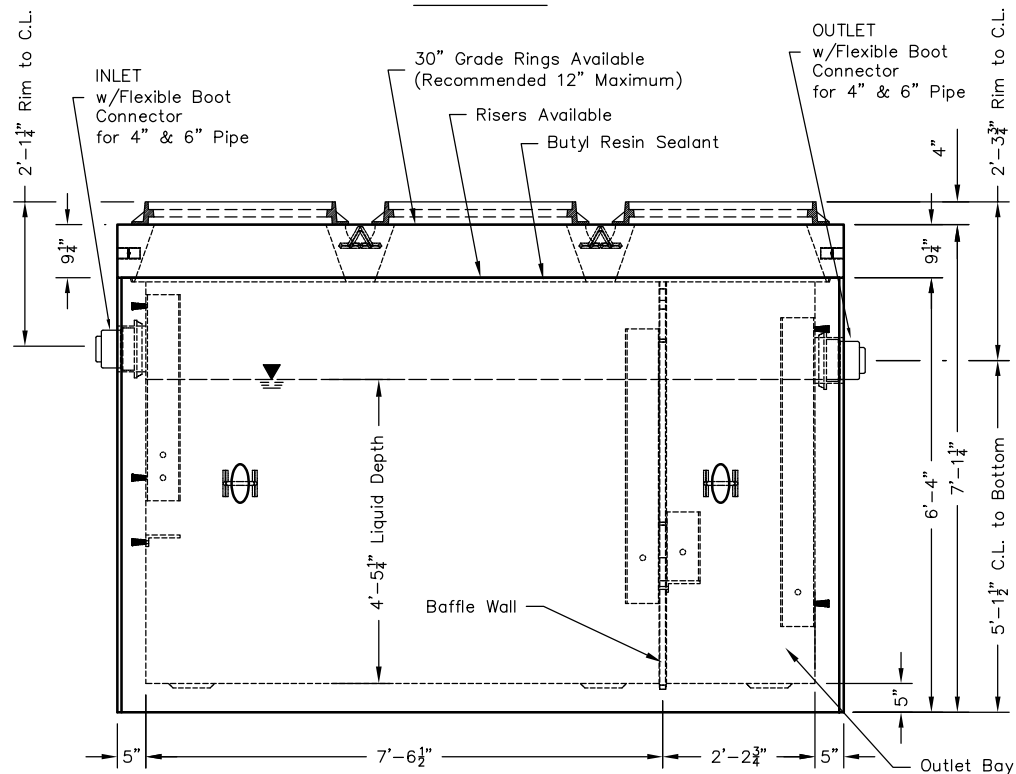

SIDE VIEW

Grease Interceptor:

- Designed in accordance with IAPMO/ANSI Z1001, Manufactured per ASTM C1613
- Loading per ASTM C890 for AASHTO HS20-44 vehicle loading and maximum soil cover of 5'-0"
- Maximum allowable DFUs (Drainage Fixture Units) = 172 (equivalent to 1,500 gallon size)
- Corrosion resistant coating/liner available to extend the life of the tank.

Manufacturer's recommendations:

- Fill lift anchor pockets with grout.
- Ventilate each end to open atmosphere.
- Prior to "Start Up" of System, fill with clean water through inlet bay to bottom of flow channel (approx. one foot deep).
- Follow Regular Inspection, Cleaning, & Maintenance Schedule (See Clean Out & Maintenance Instructions).



PO Box 323, Wilsonville, Oregon 97070-0323
Tel: (503) 682-2844 Fax: (503) 682-2657

GREASE INTERCEPTOR

File Name: 020-STRATAI-1500

Issue Date: 2016

oldcastleprecast.com/wilsonville

**STRATA
GREASE INTERCEPTOR
GGI-1500 GALLON**