




12'-0" Dia. Storm Ring Model: 12 SDR

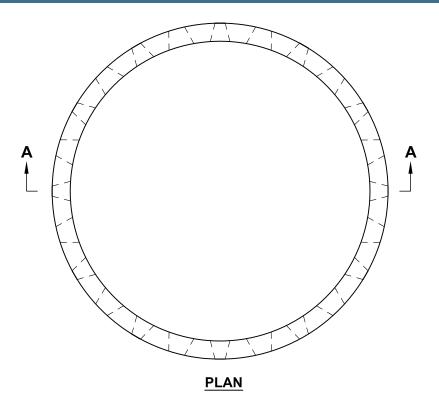



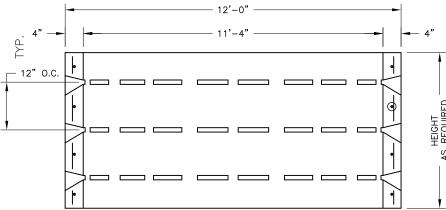

SECTION A-A

| SPECIFICATIONS | | | | |
|-----------------|------------------|----------------|----------------|------------------------|
| RING HEIGHTS | LEACHING AREA | VOLUME C.F. | VOLUME GAL. | APPROX. WEIGHT/LBS. |
| 3'-0" | 111 S.F. | 302 | 2264 | 4875 |
| 4'-0" | 150 S.F. | 403 | 3023 | 6500 |
| 5'-0" | 189 S.F. | 505 | 3788 | 8125 |

GENERAL NOTES:

- 1. Concrete: 28 Day Compressive Strength f'c = 4,000psi.
- 2. Steel Reinforcement: ASTM A-615, Grade 60, ASTM A-185.