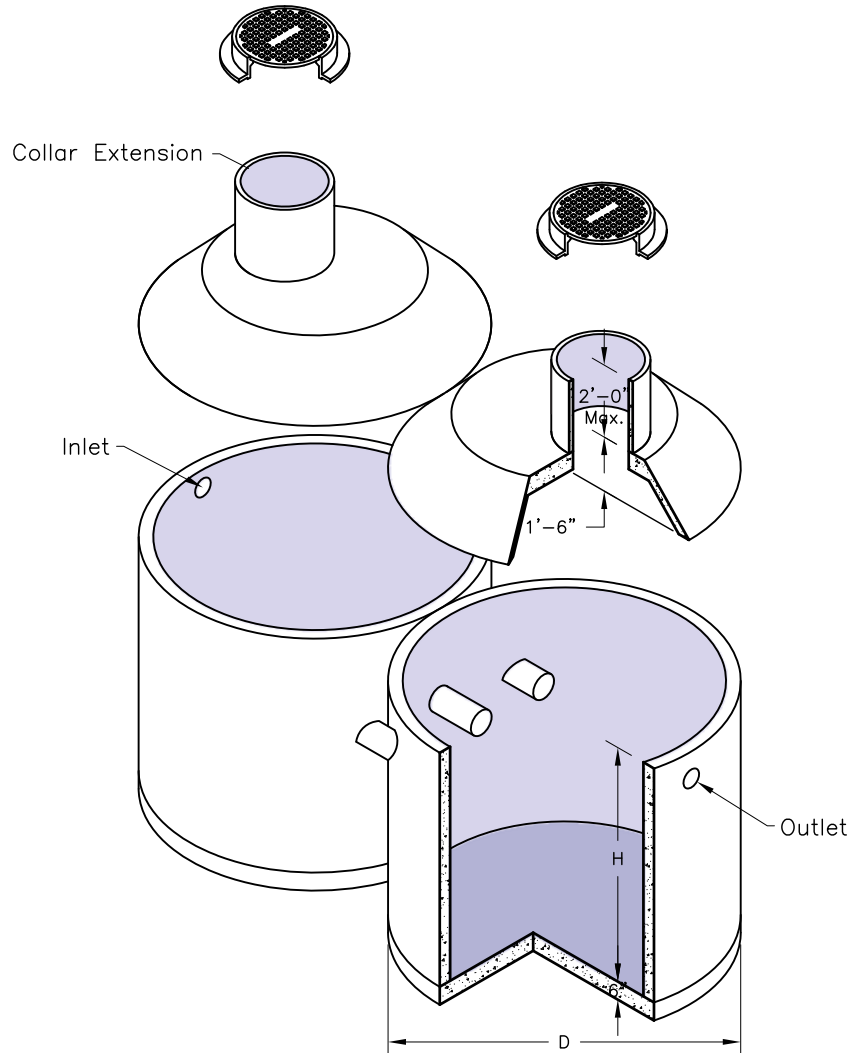


Dome
Body


SEPTIC TANK SPECIFICATIONS		
LIQUID CAP/ GALLONS	DIM "D"	DIM "H"
4000	10'-0"	5'-0"
5000	10'-0"	6'-0"
6000	10'-0"	7'-0"
7500	12'-0"	6'-0"
9000	12'-0"	7'-0"
10500	12'-0"	8'-0"

SPECIFICATIONS:

1. Concrete: 28 Day Compressive Strength $f'_c = 4,000$ psi.
2. Steel reinforcement: ASTM A-615, Grade 60, ASTM A-185.
3. Designed for AASHTO HS-20 loading with 24" cover.