


**GENERAL NOTES:** 

- 1. Concrete: 28 Day Compressive Strength f'c = 5,000 psi
- 2. Steel Reinforcement: ASTM A-615, Grade 60
- 3. Design Live Load: HS-20
- 4. Earth Cover: 0'-6" Min to 5'-0" Max

-11"ø Opening for a 8"ø Outlet Pipe.

PLAN VIEW

5'-8%"x3'-0\" Clear Opening for a Utility Vault No. 2-332P Galv.
Diamond Plate Covers, Hinged and Locking Hatch Supplied and Cast-in by Rotondo.

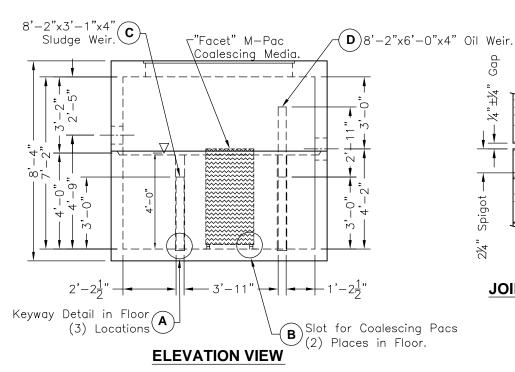

Conseal CS-440

Conseal CS-440

W. #4, #4, " Gap

Interior Face

**JOINT DETAIL** 

SCALE: 1/4" = 1'-0"

## Oldcastle Precast Rotondo

5115 Massaponax Church Road. Fredericksburg, Virginia Phone: 540.898.6300 Fax: 540.898.2389

## O/W SEPERATOR

FILE NAME: 365DTCOM30DE.DWG

ISSUE DATE: January, 2003

8'-0" x 8'-0" x 7'-2" Oil and Water Seperator (1920 G)

Copyright © 2003 Oldcastle Precest, inc.