


# Plastibeton®

Standard Covers

Traffic Rated


32,000 LB Axle Load

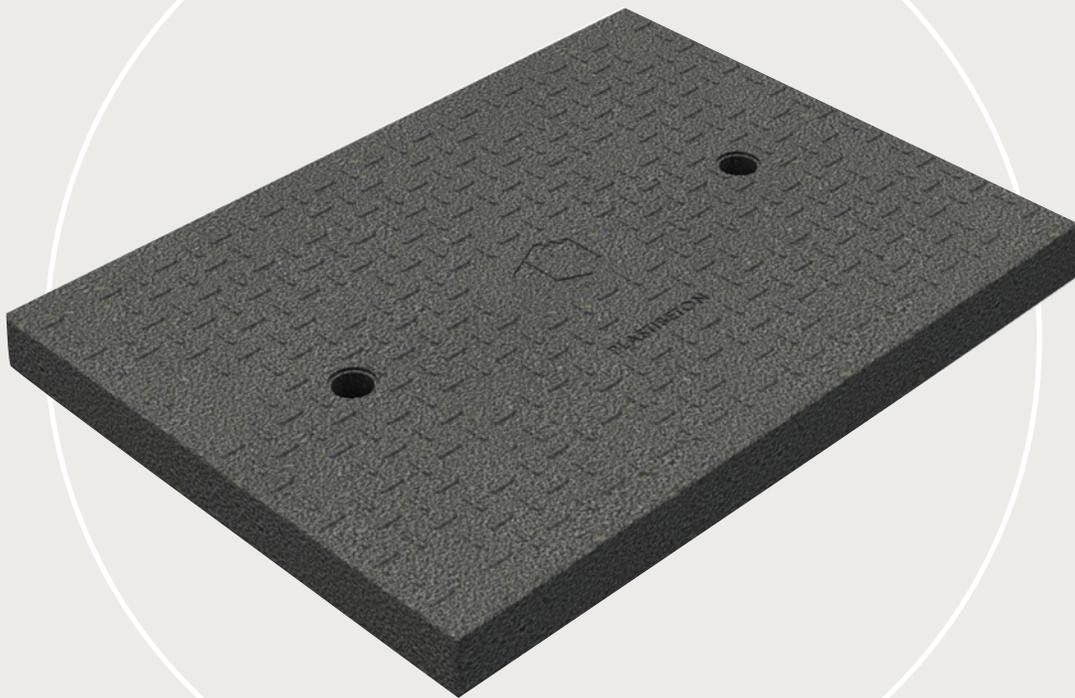

**Outlast and  
Outperform**

Plastibeton® standard covers are manufactured using a unique "Duo-Mold" construction. This high pressure, high heat molding process forms polymer concrete and reinforcement into a uniform high-strength cover. With a low resin content, Plastibeton covers are not affected by acid, oils, or freeze/thaw cycles, which means they outlast and outperform both standard concrete and composite competition.

# Most trusted traffic rated trench covers.

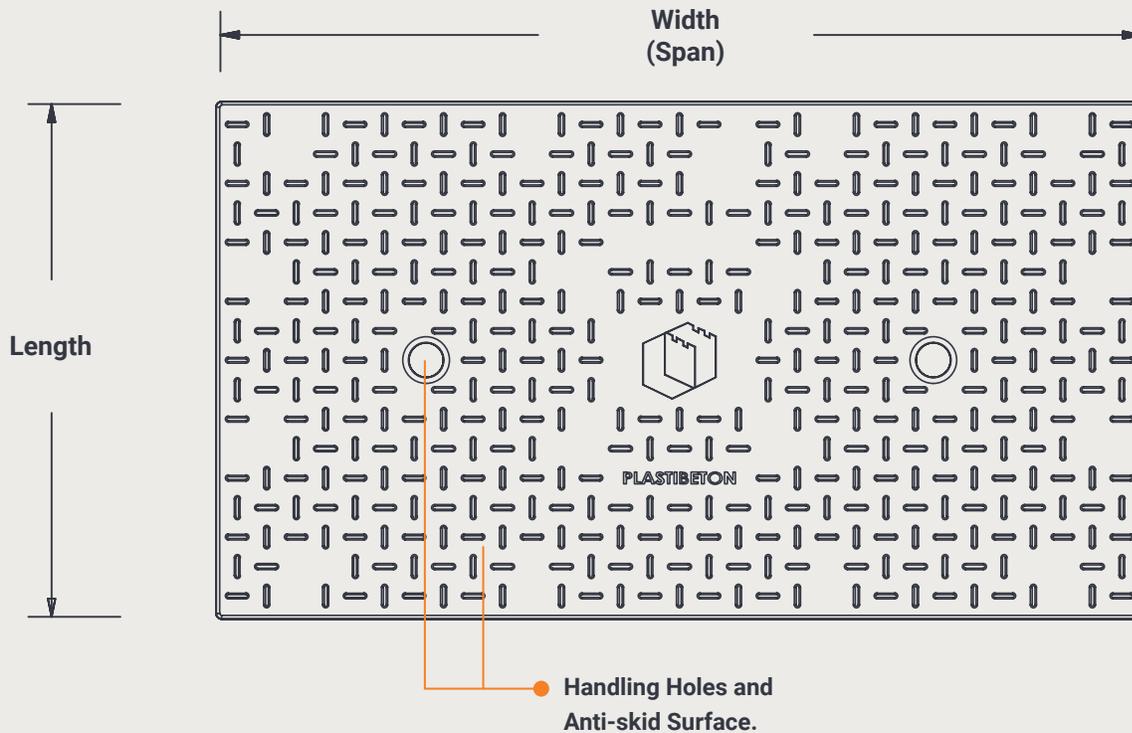

Model	Size (Width x Length x Thickness)	Weight	Covers per Section
TC6	7 1/2" x 39 3/8" x 1 1/4"	25	3
TC12	14" x 39 3/8" x 2 1/4"	75	3
TC20	22" x 39 3/8" x 2"	122	3
TC30	32" x 23 5/8" x 2 1/2"	132	5
TC40	42 3/8" x 23 5/8" x 3"	217	5

#### Half Covers

TC20 Half	22" x 19 5/8" x 2"	72	6
TC30 Half	32" x 11 11/16" x 2 1/2"	86	10
TC40 Half	42 3/8" x 11 11/16" x 3"	137	10

<b>Material</b>	High-density polymer concrete and sheet molding compound
<b>Performance</b>	Traffic Rated
<b>Rating</b>	32,000 LB Axle Load

*Dimensions may vary slightly.*

4-A-033 Revision 3/2023

Trusted partnerships.  
Full scale solutions.



[www.oldcastleinfrastructure.com](http://www.oldcastleinfrastructure.com) | (888) 965-3227